

Lasnek

Stainless Steel Cable Management



Our History

Based at our purpose built manufacturing facility conveniently located just outside London, England. Lasnek is a premier manufacturer of Stainless Steel Cable Management products.

With over 30 years of engineering expertise in stainless steel fabrication, Lasnek has consistently demonstrated our commitment to quality, service and technical innovation by supplying manufacturing, installation and production companies high quality solutions and components.

Why Choose Lasnek?

- We specialize in stainless steel fabrication techniques guaranteeing a quality product
- Substantial manufacturing facilities provides control of our extensive inventory
- Our in house design team turn concepts into reality for bespoke applications
- Same day shipping available
- Large US inventory

Company Commitment

'To provide the highest quality support, from concept and manufacturing to timely supply - our pursuit is excellence in quality stainless steel cable management products'



'The pursuit of excellence in the concept, design, manufacture and support of stainless steel cable management products'

See our facility



Installations Worldwide

- Amway
- Anheuser-Busch
- Arla Foods
- Coca-Cola
- Cott Beverages
- E. & J. Gallo Winery
- GlaxoSmithKline
- Masterfoods
- Nestlé
- Niagara Bottling
- PepsiCo
- Premier Food Group
- Rolls-Royce
- Sunny Delight
- Tetra Pak
- Wrigley

Steel Cable Management Systems

Type 1 Enclosed Electrical Wireway 4-19



Flat Cover	4-7
Apex Cover	8-11
Perforated Flat Cover	12-15
Perforated Apex Cover	16-19

Type 4X Electrical Wireway 20-23



Feed Through Wireway Lengths	20-22
Feed Through Wireway Fittings & Accessories	22-23

Open Wire Basket Trays 24-27




Wire Tray Lengths	24-26
Wire Tray Fittings & Accessories	27

Application Specific Fittings and Accessories 28-29



Adjustable Fittings	29
Application Accessories	29

Brackets and Supports 30




Trunking, Open Cable Tray, Basket	30
-----------------------------------	----

Literature and Information 31



QR Codes for all videos and literature	31
--	----

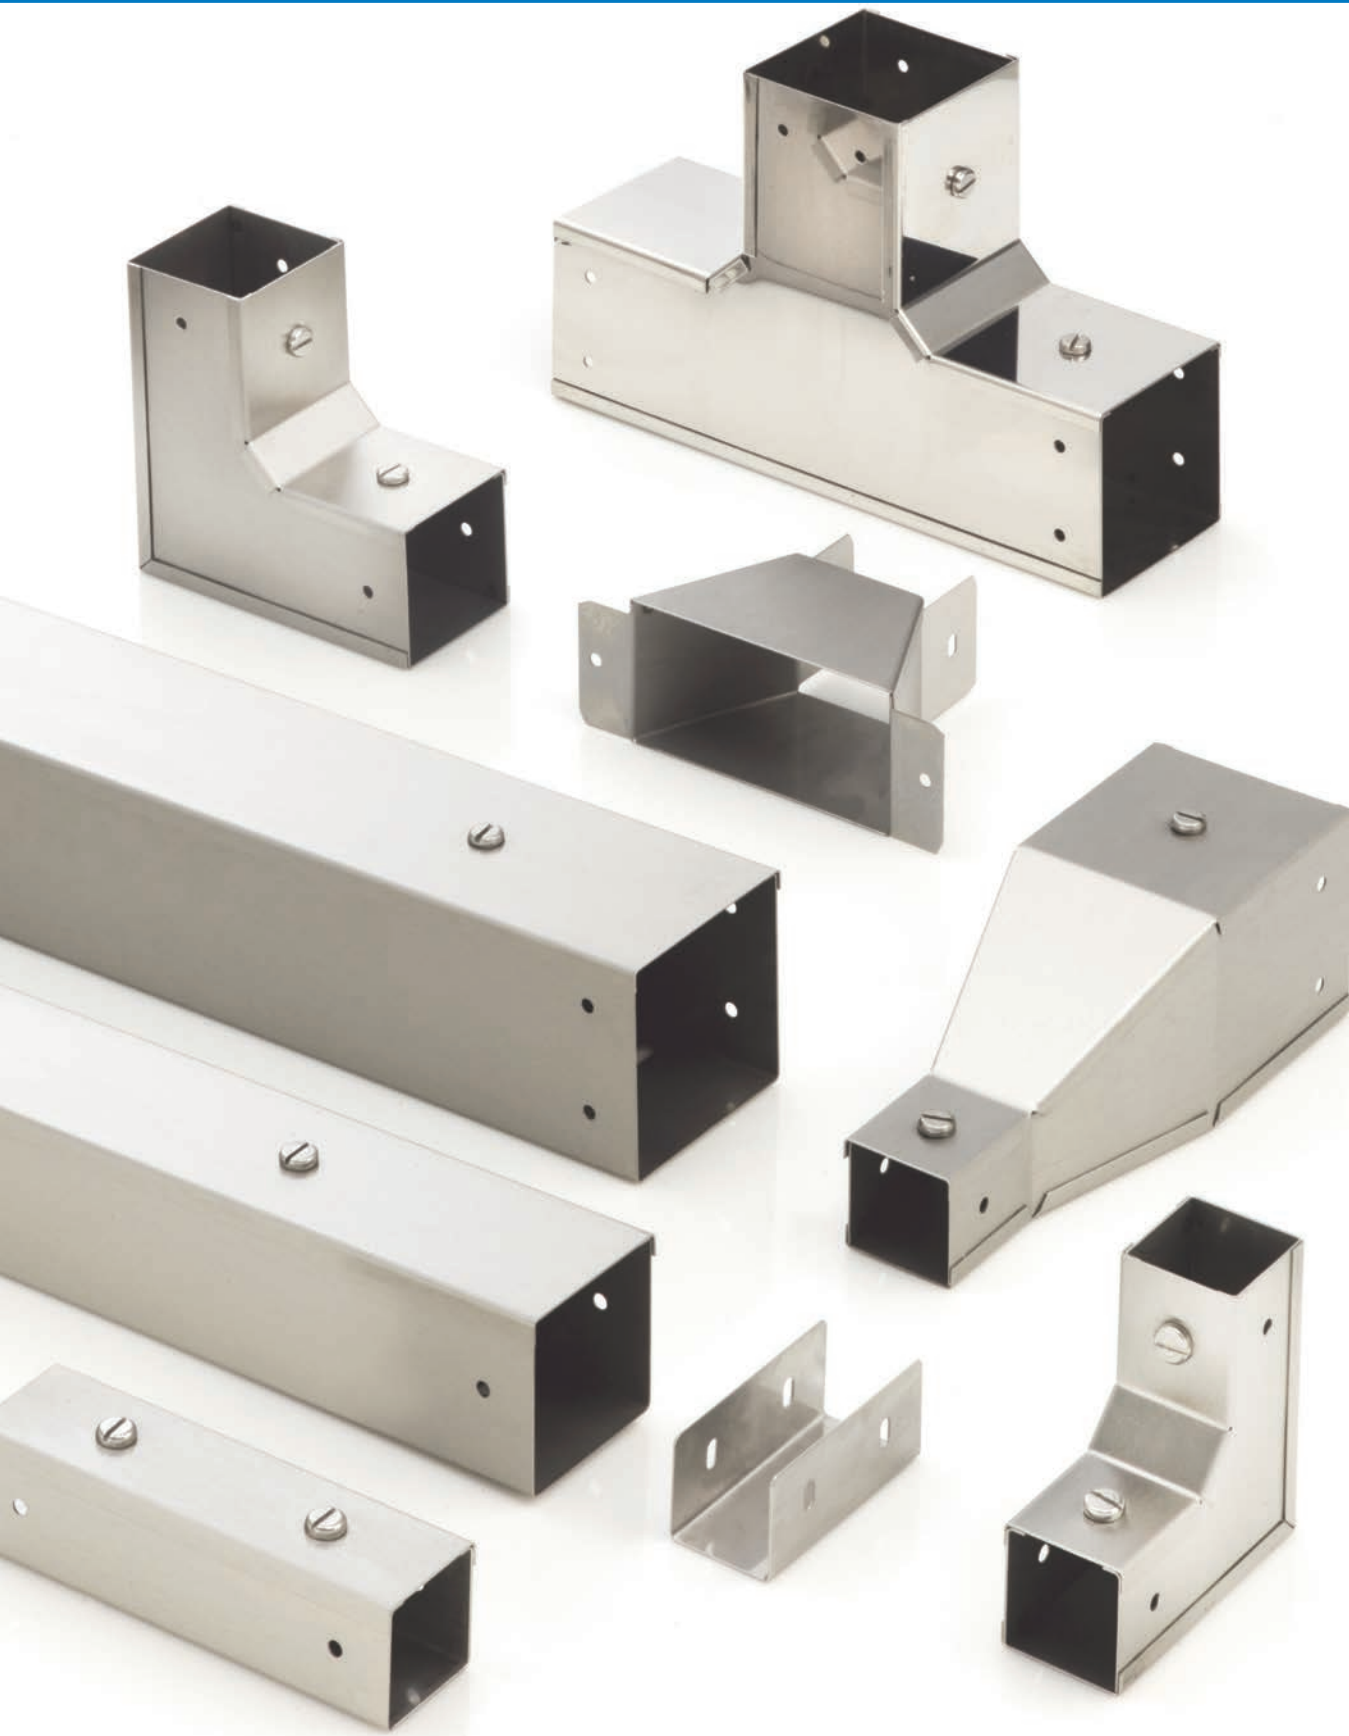

KM Series Wireway Key Features

- 3M (10ft) lengths complete with coupler
- Supplied complete with Cover and Screws/Nuts
- Covers available in 3 configurations
- Stainless Steel Grade 304 "Food Grade" 1.2mm (18 SWG) thickness
- Shipped in protective plastic coating
- Satin Finish
- Wide Range of fittings and accessories
- Stock available in 2" to 8" widths

Options Available:

- Larger sizes to 24" wide
- Stainless Steel Grade 316 "Marine Grade"
- Dividers and cable retainers
- Custom fittings and cover configurations



KM Series Trunking System

...Used extensively in production environments...

- Corrosion resistant
- Suitable for hygienic areas
- Quick and easy to install
- Offers high degree of mechanical protection
- Reduces radiated EMC

Product Specification:

Material:	304 - 1.4301 Stainless Steel 316 - 1.4404 (optional)
Thickness:	1.2mm (18 SWG)
Finish:	Dull Polish Satin – 220 grit
Standards:	cUL listed
Availability:	In stock for immediate shipping



STOCKED IN THE US

LENGTHS

All lengths are 3M - (10ft)



Dimensions

W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
2 x 2	14.6	K22-03	X22-03-D
3 x 3	21.4	K33-03	X33-03-D
4 x 4	27.1	K44-03	X44-03-D
6 x 4	33.9	K64-03	X44-03-D
6 x 6	40.6	K66-03	X66-03-D

8" thru 24" also available

FITTINGS

Tees - Inside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
2 x 2	2.0	K22-90	-
3 x 3	3.5	K33-90	X33-90-D-UNI
4 x 4	5.7	K44-90	X44-90-D-UNI
6 x 4	5.0	K64-90	X64-90-D-UNI
6 x 6	6.6	K66-90	X66-90-D-UNI

8" thru 24" also available

Tees - Outside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
2 x 2	2.0	K22-91	-
3 x 3	3.6	K33-91	X33-91-D-UNI
4 x 4	5.8	K44-91	X44-91-D-UNI
6 x 4	5.1	K64-91	X64-91-D-UNI
6 x 6	6.7	K66-91	X66-91-D-UNI

8" thru 24" also available

Tees - Front Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
2 x 2	2.1	K22-92	-
3 x 3	3.5	K33-92	X33-92-D-UNI
4 x 4	5.9	K44-92	X44-92-D-UNI
6 x 4	5.8	K64-92	X64-92-D-UNI
6 x 6	6.7	K66-92	X66-92-D-UNI

8" thru 24" also available

Bends - 90° Inside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
2 x 2	1.3	K22-93	-
3 x 3	2.5	K33-93	X33-93-D-UNI
4 x 4	4.0	K44-93	X44-93-D-UNI
6 x 4	3.9	K64-93	X64-93-D-UNI
6 x 6	5.3	K66-93	X66-93-D-UNI

8" thru 24" also available

Bends - 90° Outside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
2 x 2	1.4	K22-94	-
3 x 3	2.6	K33-94	X33-94-D-UNI
4 x 4	4.2	K44-94	X44-94-D-UNI
6 x 4	4.0	K64-94	X64-94-D-UNI
6 x 6	5.4	K66-94	X66-94-D-UNI

8" thru 24" also available

Bends - 90° Front Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
2 x 2	1.4	K22-95	-
3 x 3	2.5	K33-95	X33-95-D-UNI
4 x 4	4.2	K44-95	X44-95-D-UNI
6 x 4	4.6	K64-95	X64-95-D-UNI
6 x 6	5.3	K66-95	X66-95-D-UNI

8" thru 24" also available

Elbows - 45° Inside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
2 x 2	1.3	K22-16	-
3 x 3	2.2	K33-16	X33-16-D-UNI
4 x 4	3.6	K44-16	X44-16-D-UNI
6 x 4	3.2	K64-16	X64-16-D-UNI
6 x 6	4.1	K66-16	X66-16-D-UNI

8" thru 24" also available

Elbows - 45° Outside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
2 x 2	1.3	K22-17	-
3 x 3	2.2	K33-17	X33-17-D-UNI
4 x 4	3.6	K44-17	X44-17-D-UNI
6 x 4	3.3	K64-17	X64-17-D-UNI
6 x 6	4.0	K66-17	X66-17-D-UNI

8" thru 24" also available

Elbows - 45° Front Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
2 x 2	1.3	K22-18	-
3 x 3	2.2	K33-18	X33-18-D-UNI
4 x 4	3.6	K44-18	X44-18-D-UNI
6 x 4	3.4	K64-18	X64-18-D-UNI
6 x 6	4.1	K66-18	X66-18-D-UNI

8" thru 24" also available

ACCESSORIES

Side Couplings



W x H (in)	Wireway Ref.
2 x 2	K22-20
3 x 3	K33-20
4 x 4	K44-20
6 x 4	K64-20
6 x 6	K66-20

8" thru 24" also available

End Caps



W x H (in)	Wireway Ref.
2 x 2	K22-21
3 x 3	K33-21
4 x 4	K44-21
6 x 4	K64-21
6 x 6	K66-21

8" thru 24" also available

Straight Couplings



W x H (in)	Wireway Ref.
2 x 2	K22-22
3 x 3	K33-22
4 x 4	K44-22
6 x 4	K64-22
6 x 6	K66-22

8" thru 24" also available

Cover Fixing Kits



W x H (in)	Wireway Ref.
2 x 2	X20-23
3 x 3	X30-23
4 x 4	X40-23
Above 4	XT0-23

8" thru 24" also available

Flange Adaptors - Removable Cover



W x H (in)	Wireway Ref.	Divider Ref.
2 x 2	K22-25	-
3 x 3	K33-25	X33-25-D-UNI
4 x 4	K44-25	X44-25-D-UNI
6 x 4	K64-25	X64-25-D-UNI
6 x 6	K66-25	X66-25-D-UNI

8" thru 24" also available

Square Reducers



W x H (in)	Wireway Ref.
3 x 3	K33S**
4 x 4	K44S**
6 x 4	K64S**
6 x 6	K66S**

Screw Sets



Size	Wireway Ref.
M6 x 10	X00-24

Dividers not available for 2" fittings



KS-10 Series Wireway Key Features

- 3M (10ft) lengths complete with coupler
- Supplied Complete with 10 degree Apex Cover and screws/nuts
- Fitting covers available in 3 configurations
- Stainless Steel Grade 304 "Food Grade" 1.2mm (18 SWG) thickness
- Change of cover direction kits available
- Satin Finish
- Wide range of fittings and accessories
- Stock available in 2" to 6" widths
- Shipped in protective plastic coating

Options Available:

- Larger sizes from 8" to 24" wide
- Stainless Steel Grade 316 "Marine Grade"
- Dividers and cable retainers
- Custom fittings and cover configurations



Scan The QR Code To View Installation Video

KS-10 Series Apex Wireway System...

...A new slant on a Lasnek favorite

- For use where flat surfaces are prohibited
- Reduction in build up of unwanted debris
- Durable and with high protection to corrosion
- Hygienic and visually appealing
- Easy installation
- Offers high degree of mechanical protection
- Reduces radiated EMC
- Compatible with the Lasnek KM series

Product Specification:

Material:	304 - 1.4301 Stainless Steel 316 - 1.4404 (optional)
Thickness:	1.2mm (18 SWG)
Finish:	Dull Polish Satin – 220 grit
Standards:	cUL listed
Availability:	In stock for immediate shipping



LENGTHS

All lengths are 3M - (10ft)



Dimensions

W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	23.3	K33-03-S10	X33-03-D
4 x 4	30.8	K44-03-S10	X44-03-D
6 x 4	39.6	K64-03-S10	X44-03-D
6 x 6	45.1	K66-03-S10	X66-03-D

8" thru 24" also available

FITTINGS

Tees - Inside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	3.6	K33-90-S10	X33-90-D-UNI
4 x 4	5.8	K44-90-S10	X44-90-D-UNI
6 x 4	6.6	K64-90-S10	X64-90-D-UNI
6 x 6	6.7	K66-90-S10	X66-90-D-UNI

8" thru 24" also available

Tees - Outside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	3.7	K33-91-S10	X33-91-D-UNI
4 x 4	5.8	K44-91-S10	X44-91-D-UNI
6 x 4	6.1	K64-91-S10	X64-91-D-UNI
6 x 6	6.7	K66-91-S10	X66-91-D-UNI

8" thru 24" also available

Tees - Front Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	3.7	K33-92-S10	X33-92-D-UNI
4 x 4	5.9	K44-92-S10	X44-92-D-UNI
6 x 4	5.9	K64-92-S10	X64-92-D-UNI
6 x 6	6.7	K66-92-S10	X66-92-D-UNI

8" thru 24" also available

Bends - 90° Inside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	2.5	K33-93-S10	X33-93-D-UNI
4 x 4	4.3	K44-93-S10	X44-93-D-UNI
6 x 4	3.9	K64-93-S10	X64-93-D-UNI
6 x 6	5.3	K66-93-S10	X66-93-D-UNI


8" thru 24" also available

Bends - 90° Outside Cover




W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	2.5	K33-94-S10	X33-94-D-UNI
4 x 4	4.3	K44-94-S10	X44-94-D-UNI
6 x 4	4.0	K64-94-S10	X64-94-D-UNI
6 x 6	5.5	K66-94-S10	X66-94-D-UNI


8" thru 24" also available

Bends - 90° Front Cover	W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
	3 x 3	2.7	K33-95-S10	X33-95-D-UNI
	4 x 4	4.2	K44-95-S10	X44-95-D-UNI
	6 x 4	4.6	K64-95-S10	X64-95-D-UNI
	6 x 6	5.4	K66-95-S10	X66-95-D-UNI


8" thru 24" also available

Elbows - 45° Inside Cover	W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
	3 x 3	2.6	K33-16-S10	X33-16-D-UNI
	4 x 4	3.8	K44-16-S10	X44-16-D-UNI
	6 x 4	3.8	K64-16-S10	X64-16-D-UNI
	6 x 6	4.1	K66-16-S10	X66-16-D-UNI

8" thru 24" also available


Elbows - 45° Outside Cover	W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
	3 x 3	2.6	K33-17-S10	X33-17-D-UNI
	4 x 4	3.7	K44-17-S10	X44-17-D-UNI
	6 x 4	3.3	K64-17-S10	X64-17-D-UNI
	6 x 6	4.4	K66-17-S10	X66-17-D-UNI

8" thru 24" also available


Elbows - 45° Front Cover	W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
	3 x 3	2.2	K33-18-S10	X33-18-D-UNI
	4 x 4	3.0	K44-18-S10	X44-18-D-UNI
	6 x 4	3.4	K64-18-S10	X64-18-D-UNI
	6 x 6	4.4	K66-18-S10	X66-18-D-UNI

8" thru 24" also available


ACCESSORIES

Side Couplings	W x H (in)	Wireway Ref.
	3 x 3	K33-20
	4 x 4	K44-20
	6 x 4	K64-20
	6 x 6	K66-20


8" thru 24" also available


End Caps	W x H (in)	Wireway Ref.
	3 x 3	K33-21-S10
	4 x 4	K44-21-S10
	6 x 4	K64-21-S10
	6 x 6	K66-21-S10

8" thru 24" also available


Straight Couplings	W x H (in)	Wireway Ref.
	3 x 3	X33-22
	4 x 4	X44-22
	6 x 4	X64-22
	6 x 6	X66-22

8" thru 24" also available


Cover Fixing Kits	W x H (in)	Wireway Ref.
	3	X30-23-S10
	4 and over	XT0-23

Flange Adaptors - Removable Cover	W x H (in)	Wireway Ref.	Divider Ref.
	3 x 3	K33-25-S10	X33-25-D-UNI
	4 x 4	K44-25-S10	X44-25-D-UNI
	6 x 4	K64-25-S10	X64-25-D-UNI
	6 x 6	K66-25-S10	X66-25-D-UNI

8" thru 24" also available

Square Reducers	W x H (in)	Wireway Ref.
	3 x 3	K33S**
	4 x 4	K44S**
	6 x 4	K64S**
	6 x 6	K66S**

8" thru 24" also available

Screw Sets	Size	Wireway Ref.
	M6 x 10	X00-24



TT Series Wireway Key Features

- 3M (10ft) lengths complete with coupler
- Supplied Complete with Cover and screws/nuts
- Covers available in three configurations
- Stainless Steel Grade 304 "Food Grade" 1.2mm (18 SWG) thickness
- Shipped in protective plastic coating
- Satin Finish
- Wide Range of fittings and accessories
- Stock available in 2" to 8" widths

Options Available:

- Larger sizes to 24" wide
- Stainless Steel Grade 316 "Marine Grade"
- Dividers and cable retainers
- Custom fittings and cover configurations



TT Series Perforated Wireway

...Used extensively throughout the North American bottling industry...

- Corrosion resistant
- Suitable for hygienic areas
- Quick and easy to install
- Offers high degree of mechanical protection
- Reduces radiated EMC

Product Specification:

Material:	304 - 1.4301 Stainless Steel 316 - 1.4404 (optional)
Thickness:	1.2mm (18 SWG)
Finish:	Dull Polish Satin – 220 grit
Standards:	cUL Classified
Availability:	In stock for immediate shipping



LENGTHS

All lengths are 3M - (10ft)



Dimensions

W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	22.0	TT33-03	XTT33-03-D
4 x 4	27.1	TT44-03	XTT44-03-D
6 x 4	37.4	TT64-03	XTT44-03-D
6 x 6	44.0	TT66-03	XTT66-03-D

8" thru 24" also available

FITTINGS

Tees - Inside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	3.5	K33-90	X33-90-D-UNI
4 x 4	5.7	K44-90	X44-90-D-UNI
6 x 4	5.0	K64-90	X64-90-D-UNI
6 x 6	6.6	K66-90	X66-90-D-UNI

8" thru 24" also available

Tees - Outside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	3.6	K33-91	X33-91-D-UNI
4 x 4	5.8	K44-91	X44-91-D-UNI
6 x 4	5.1	K64-91	X64-91-D-UNI
6 x 6	6.7	K66-91	X66-91-D-UNI

8" thru 24" also available

Tees - Front Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	3.5	K33-92	X33-92-D-UNI
4 x 4	5.9	K44-92	X44-92-D-UNI
6 x 4	5.8	K64-92	X64-92-D-UNI
6 x 6	6.7	K66-92	X66-92-D-UNI

8" thru 24" also available

Bends - 90° Inside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	2.5	K33-93	X33-93-D-UNI
4 x 4	4.0	K44-93	X44-93-D-UNI
6 x 4	3.9	K64-93	X64-93-D-UNI
6 x 6	5.3	K66-93	X66-93-D-UNI

8" thru 24" also available

Bends - 90° Outside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	2.6	K33-94	X33-94-D-UNI
4 x 4	4.2	K44-94	X44-94-D-UNI
6 x 4	4.0	K64-94	X64-94-D-UNI
6 x 6	5.4	K66-94	X66-94-D-UNI

8" thru 24" also available

Bends - 90° Front Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	2.5	K33-95	X33-95-D-UNI
4 x 4	4.2	K44-95	X44-95-D-UNI
6 x 4	4.6	K64-95	X64-95-D-UNI
6 x 6	5.3	K66-95	X66-95-D-UNI

8" thru 24" also available

Elbows - 45° Inside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	2.2	K33-16	X33-16-D-UNI
4 x 4	3.6	K44-16	X44-16-D-UNI
6 x 4	3.2	K64-16	X64-16-D-UNI
6 x 6	4.0	K66-16	X66-16-D-UNI

8" thru 24" also available

Elbows - 45° Outside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	2.2	K33-17	X33-17-D-UNI
4 x 4	3.6	K44-17	X44-17-D-UNI
6 x 4	3.3	K64-17	X64-17-D-UNI
6 x 6	4.0	K66-17	X66-17-D-UNI

8" thru 24" also available

Elbows - 45° Front Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	2.2	K33-18	X33-18-D-UNI
4 x 4	3.6	K44-18	X44-18-D-UNI
6 x 4	3.4	K64-18	X64-18-D-UNI
6 x 6	4.1	K66-18	X66-18-D-UNI

8" thru 24" also available

ACCESSORIES

Side Couplings



W x H (in)	Wireway Ref.
3 x 3	K33-20
4 x 4	K44-20
6 x 4	K64-20
6 x 6	K66-20

8" thru 24" also available

End Caps



W x H (in)	Wireway Ref.
3 x 3	K33-21
4 x 4	K44-21
6 x 4	K64-21
6 x 6	K66-21

8" thru 24" also available

Straight Couplings



Size (in)	Wireway Ref.
3 x 3	K33-22
4 x 4	K44-22
6 x 4	K64-22
6 x 6	K66-22

8" thru 24" also available

Cover Fixing Kits



Size (in)	Wireway Ref.
3 x 3	X30-23
4 x 4	X40-23
over 4	XT0-23

Flange Adapter - Removable Cover



W x H (in)	Wireway Ref.	Divider Ref.
3 x 3	K33-25	X33-25-D-UNI
4 x 4	K44-25	X44-25-D-UNI
6 x 4	K64-25	X64-25-D-UNI
6 x 6	K66-25	X66-25-D-UNI

8" thru 24" also available

Square Reducers



W x H (in)	Wireway Ref.
3 x 3	K33S**
4 x 4	K44S**
6 x 4	K64S**
6 x 6	K66S**

8" thru 24" also available

Screw Sets



Size	Wireway Ref.
M6 x 10	X00-24

STOCKED IN THE US

16 Stainless Steel TT-S10 Series Perforated



In Stock Availability

Same Day Shipping

www.lasnek.com

TT-S10 Series Wireway Key Features

- 3M (10ft) lengths complete with coupler
- Supplied complete with 10 degree Apex Cover and screws/nuts
- Fitting covers available in three configurations
- Stainless Steel Grade 304 "Food Grade" 1.2mm (18 SWG) thickness
- Change of cover direction kits available
- Satin Finish
- Wide range of fittings and accessories
- Stock available in 2" to 6" widths
- Shipped in protective plastic coating

Options Available:

- Larger sizes from 8" to 24" wide
- Stainless Steel Grade 316 "Marine Grade"
- Dividers and cable retainers
- Custom fittings and cover configurations



Scan The QR Code To View Installation Video

TT-S10 Series Perforated Apex Wireway

...One system all the features...

- For use where flat surfaces are prohibited
- Reduction in build up of unwanted debris
- Durable and with high protection to corrosion
- Hygienic and aesthetically pleasing
- Easy installation
- Offers high degree of mechanical protection
- Reduces radiated EMC
- Compatible with the Lasnek TT series

Product Specification:

Material:	304 - 1.4301 Stainless Steel 316 - 1.4404 (optional)
Thickness:	1.2mm (18 SWG)
Finish:	Dull Polish Satin – 220 grit
Standards:	cUL Classified
Availability:	In stock for immediate shipping



18 Stainless Steel TT-S10 Series Perforated

LENGTHS

All lengths are 3M - (10ft)



Dimensions

W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	23.3	TT33-03-S10	XTT33-03-D
4 x 4	29.9	TT44-03-S10	XTT44-03-D
6 x 4	38.5	TT64-03-S10	XTT44-03-D
6 x 6	44.5	TT66-03-S10	XTT66-03-D

8" thru 24" also available

FITTINGS

Tees - Inside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	3.6	K33-90-S10	X33-90-D-UNI
4 x 4	5.5	K44-90-S10	X44-90-D-UNI
6 x 4	6.6	K64-90-S10	X64-90-D-UNI
6 x 6	6.7	K66-90-S10	X66-90-D-UNI

8" thru 24" also available

Tees - Outside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	3.7	K33-91-S10	X33-91-D-UNI
4 x 4	5.8	K44-91-S10	X44-91-D-UNI
6 x 4	6.1	K64-91-S10	X64-91-D-UNI
6 x 6	6.7	K66-91-S10	X66-91-D-UNI

8" thru 24" also available

Tees - Front Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	3.7	K33-92-S10	X33-92-D-UNI
4 x 4	5.9	K44-92-S10	X44-92-D-UNI
6 x 4	5.9	K64-92-S10	X64-92-D-UNI
6 x 6	6.7	K66-92-S10	X66-92-D-UNI

8" thru 24" also available

Bends - 90° Inside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	2.5	K33-93-S10	X33-93-D-UNI
4 x 4	4.3	K44-93-S10	X44-93-D-UNI
6 x 4	3.9	K64-93-S10	X64-93-D-UNI
6 x 6	5.3	K66-93-S10	X66-93-D-UNI

8" thru 24" also available

Bends - 90° Outside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	2.5	K33-94-S10	X33-94-D-UNI
4 x 4	4.3	K44-94-S10	X44-94-D-UNI
6 x 4	4.0	K64-94-S10	X64-94-D-UNI
6 x 6	5.5	K66-94-S10	X66-94-D-UNI

8" thru 24" also available

Bends - 90° Front Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	2.7	K33-95-S10	X33-95-D-UNI
4 x 4	4.2	K44-95-S10	X44-95-D-UNI
6 x 4	4.6	K64-95-S10	X64-95-D-UNI
6 x 6	5.4	K66-95-S10	X66-95-D-UNI

8" thru 24" also available

Elbows - 45° Inside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	2.6	K33-16-S10	X33-16-D-UNI
4 x 4	3.8	K44-16-S10	X44-16-D-UNI
6 x 4	3.8	K64-16-S10	X64-16-D-UNI
6 x 6	4.1	K66-16-S10	X66-16-D-UNI

8" thru 24" also available

Elbows - 45° Outside Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	2.6	K33-17-S10	X33-17-D-UNI
4 x 4	3.7	K44-17-S10	X44-17-D-UNI
6 x 4	3.3	K64-17-S10	X64-17-D-UNI
6 x 6	4.4	K66-17-S10	X66-17-D-UNI

8" thru 24" also available

Elbows - 45° Front Cover



W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
3 x 3	2.2	K33-18-S10	X33-18-D-UNI
4 x 4	3.0	K44-18-S10	X44-18-D-UNI
6 x 4	3.4	K64-18-S10	X64-18-D-UNI
6 x 6	4.4	K66-18-S10	X66-18-D-UNI

8" thru 24" also available

ACCESSORIES

Side Couplings



W x H (in)	Wireway Ref.
3 x 3	K33-20
4 x 4	K44-20
6 x 4	K64-20
6 x 6	K66-20

8" thru 24" also available

End Caps



W x H (in)	Wireway Ref.
3 x 3	K33-21-S10
4 x 4	K44-21-S10
6 x 4	K64-21-S10
6 x 6	K66-21-S10

8" thru 24" also available

Straight Couplings



Size (in)	Wireway Ref.
3 x 3	X33-22
4 x 4	X44-22
6 x 4	X64-22
6 x 6	X66-22

8" thru 24" also available

Cover Fixing Kits



Size (in)	Wireway Ref.
3 x 3	X30-23-S10
4 x 4	X40-23-S10
over 4	XT0-23-S10

Flange Adapter - Removable Cover



W x H (in)	Wireway Ref.	Divider Ref.
3 x 3	K33-25-S10	X33-25-D-UNI
4 x 4	K44-25-S10	X44-25-D-UNI
6 x 4	K64-25-S10	X64-25-D-UNI
6 x 6	K66-25-S10	X66-25-D-UNI

8" thru 24" also available

Square Reducers



W x H (in)	Wireway Ref.
3 x 3	K33S**
4 x 4	K44S**
6 x 4	K64S**
6 x 6	K66S**

8" thru 24" also available

Screw Sets



Size	Wireway Ref.
M6 x 10	X00-24






FT Series Wireway Key Features

- UL Listed type 4X wireway
- Choice of Lengths 1ft, 2ft, 5ft or 10ft with gasket
- Stainless Steel Grade 304 "Food Grade"
1.5mm (16 SWG) - 2mm (14 SWG) for 8"
- Inside dimensions available 2.5", 4", 6" or 8"
- Lengths complete with retained hinge
- 4mm (8 SWG) stainless steel flanges supplied with gasket & hardware

Options Available:

- Stainless Steel Grade 316 "Marine Grade"
- Length dividers
- Mounting brackets

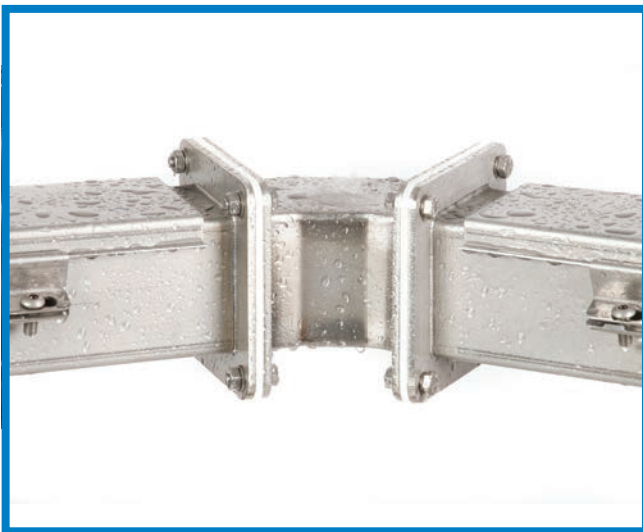

FT Series 4X Wireway

...The Ultimate Watertight Wireway System...

- For use in areas subject to pressure washing
- Designed for hygienic environments
- Suitable for aggressive atmospheres
- High degree of mechanical cable protection
- Easy to install with proven repeatability





Product Specification:

Material:	1.5mm (16 SWG) 304 Stainless Steel
Flanges:	4mm (8 SWG) 304 Stainless Steel
Finish:	Matt – no grain
Lengths:	1ft / 2ft / 5ft / 10ft with cover gasket pre fitted
Flange Kit:	Included, 1 per length & fitting
Sizes:	2½", 4", 6" (8" on request)
Standard:	cUL listed







LENGTHS


Dimensions


1ft Straight - Hinged	WxH (in)	Weight (lb)	Wireway Ref.
	2 1/2 x 2 1/2	3.9	FT22-LI-012-H
	4 x 4	5.5	FT44-LI-012-H
	6 x 6	7.9	FT66-LI-012-H
2ft Straight - Hinged	WxH (in)	Weight (lb)	Wireway Ref.
	2 1/2 x 2 1/2	6.6	FT22-LI-024-H
	4 x 4	9.3	FT44-LI-024-H
	6 x 6	13.4	FT66-LI-024-H
5ft Straight - Hinged	WxH (in)	Weight (lb)	Wireway Ref.
	2 1/2 x 2 1/2	14.9	FT22-LI-060-H
	4 x 4	21.2	FT44-LI-060-H
	6 x 6	30.3	FT66-LI-060-H
10ft Straight - Hinged	WxH (in)	Weight (lb)	Wireway Ref.
	2 1/2 x 2 1/2	28.6	FT22-LI-120-H
	4 x 4	40.9	FT44-LI-120-H
	6 x 6	58.5	FT66-LI-120-H

FITTINGS


90° Bend	WxH (in)	Weight (lb)	Wireway Ref.
	2 1/2 x 2 1/2	2.5	FT22-GB-90-F
	4 x 4	4.0	FT44-GB-90-F
	6 x 6	6.6	FT66-GB-90-F
Tee Piece	WxH (in)	Weight (lb)	Wireway Ref.
	2 1/2 x 2 1/2	4.0	FT22-GT-F
	4 x 4	4.5	FT44-GT-F
	6 x 6	9.5	FT66-GT-F
22.5° Bend	WxH (in)	Weight (lb)	Wireway Ref.
	2 1/2 x 2 1/2	1.6	FT22-GB-22.5-F
	4 x 4	2.5	FT44-GB-22.5-F
	6 x 6	3.8	FT66-GB-22.5-F


45° Bend	WxH (in)	Weight (lb)	Wireway Ref.
	2 1/2 x 2 1/2	1.7	FT22-GB-45-F
	4 x 4	3.1	FT44-GB-45-F
	6 x 6	4.1	FT66-GB-45-F


Y Adapter	WxH (in)	Weight (lb)	Wireway Ref.
	2 1/2 x 2 1/2	2.0	FT22-YA-F
	4 x 4	2.9	FT44-YA-F
	6 x 6	4.0	FT66-YA-F


Cut Down Unit	WxH (in)	Weight (lb)	Wireway Ref.
	2 1/2 x 2 1/2	3.0	FT22-CO-012
	4 x 4	4.5	FT44-CO-012
	6 x 6	6.7	FT66-CO-012


ACCESSORIES

Y Adapter Kit	WxH (in)	Weight (lb)	Wireway Ref.
	2 1/2 x 2 1/2	0.4	FT22-YA-BC
	4 x 4	0.5	FT44-YA-BC
	6 x 6	0.7	FT66-YA -BC


Closure Plate	WxH (in)	Weight (lb)	Wireway Ref.
	2 1/2 x 2 1/2	0.7	FT22-CP
	4 x 4	1.2	FT44-CP
	6 x 6	2.3	FT66-CP

Box Connector	WxH (in)	Weight (lb)	Wireway Ref.
	2 1/2 x 2 1/2	0.5	FT22-BC
	4 x 4	0.7	FT44-BC
	6 x 6	1.1	FT66-BC

Edge Reducer	WxH (in)	Weight (lb)	Wireway Ref.
	4 x 4 to 2 x 2	0.4	FT44-22-REH
	6 x 6 to 4 x 4	0.8	FT66-44-REH

Center Reducer	WxH (in)	Weight (lb)	Wireway Ref.
	4 x 4 to 2 x 2	0.4	FT44-22-RCH
	6 x 6 to 4 x 4	0.8	FT66-44-RCH



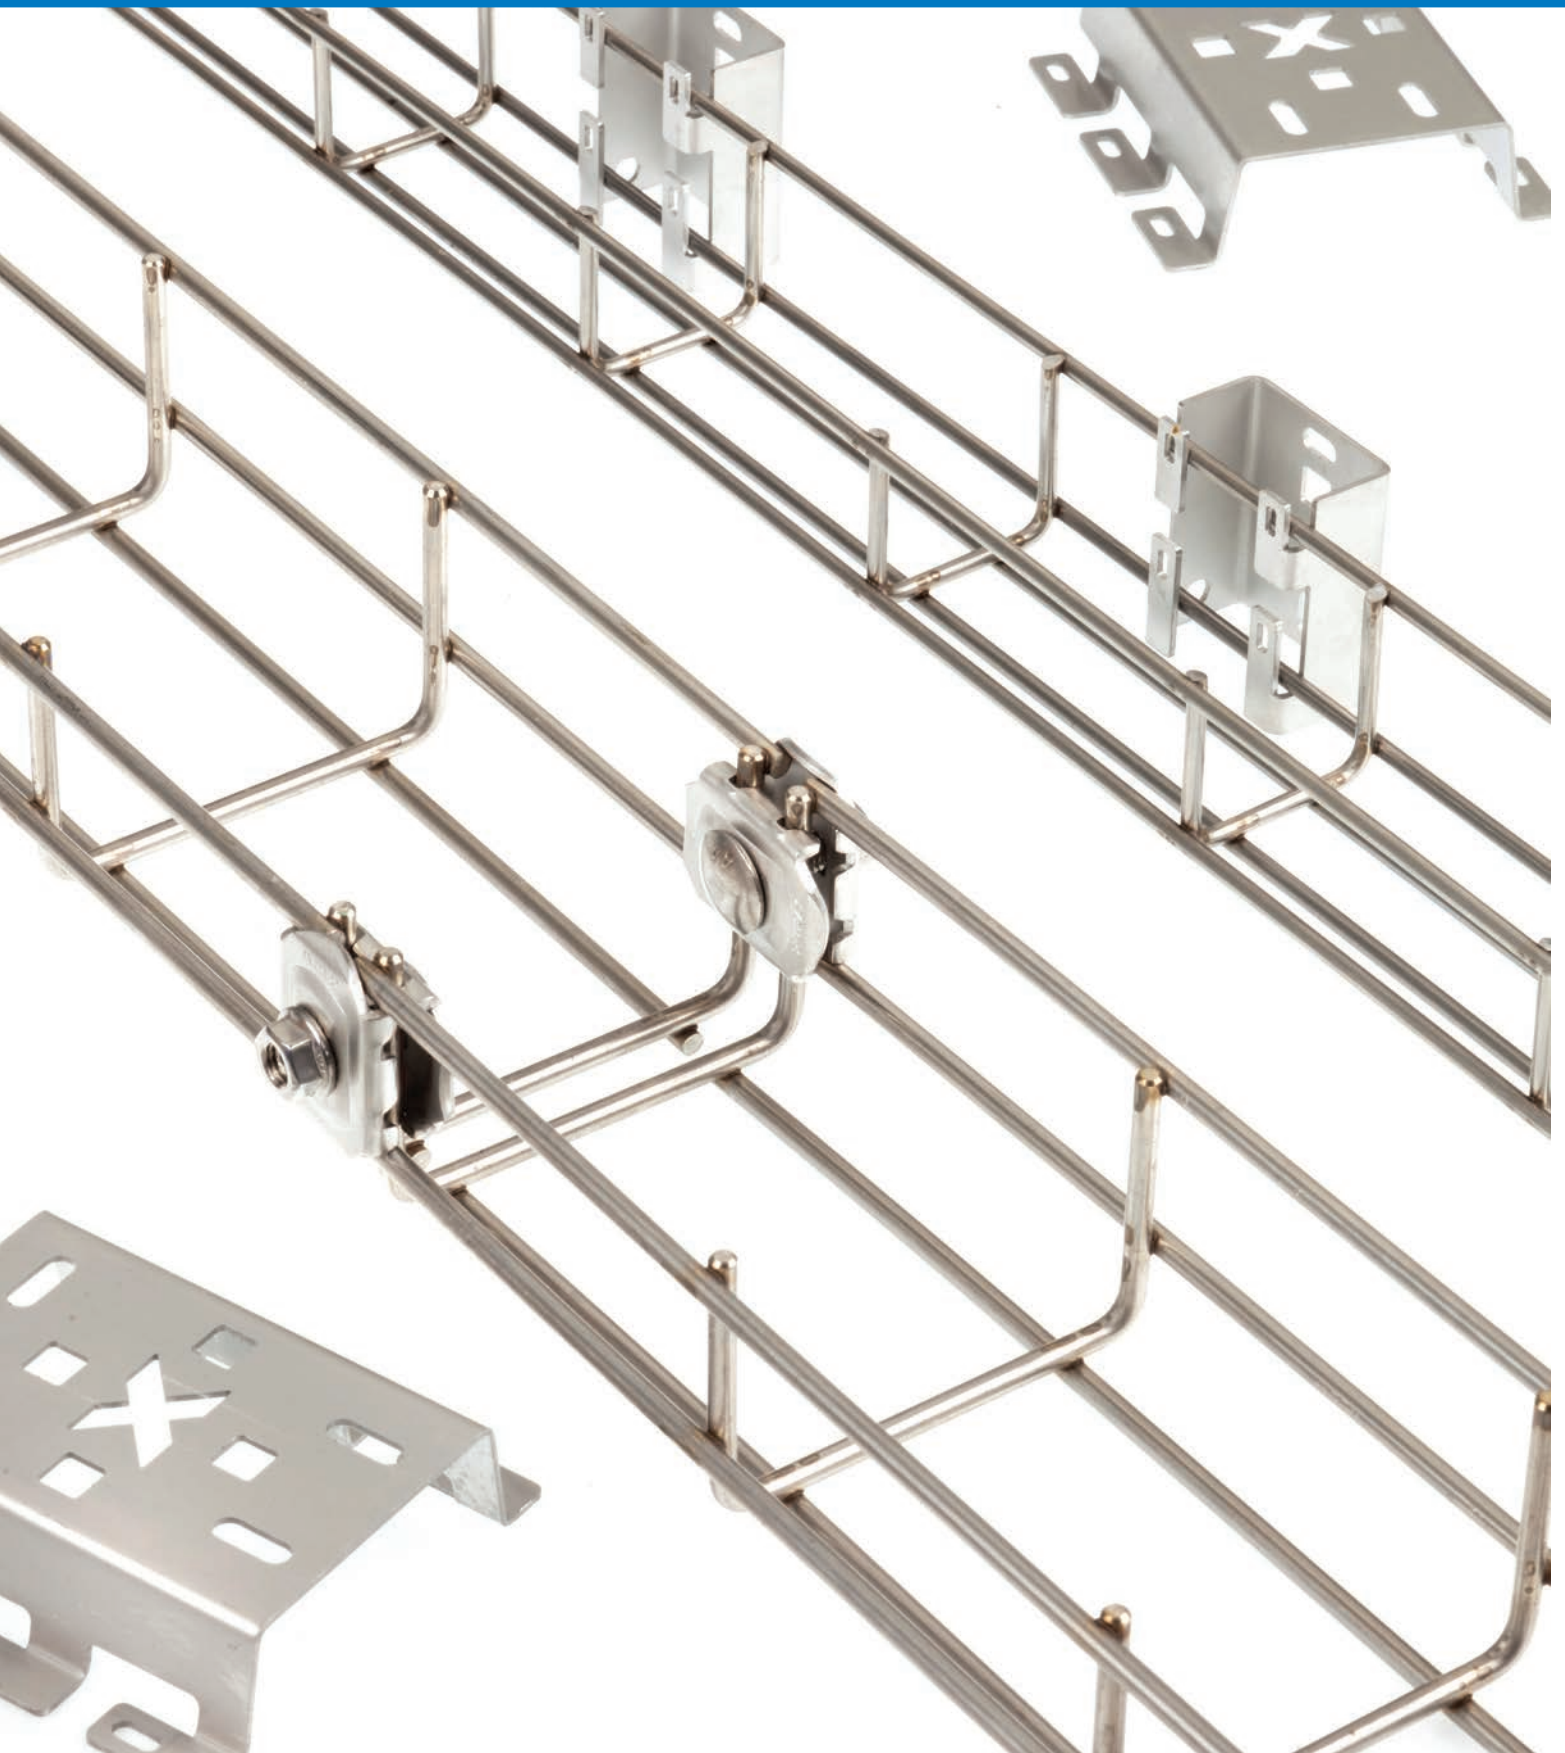


Wire Basket Tray Features:

- Easy transportation using 2.5M (8¹/₄ ft) length
- Choice of 9 different widths ranging from 2" to 24"
- Additional strength with wire thickness of 8 SWG to 4 SWG
- Reduced deflection with side profile heights of 2" & 4"
- Easy cable clamping with a minimum of two wires in the base for widths >6"
- Additional strength with M8 and unique coupler giving free location of any joint
- All fixings and lengths in stainless steel grade 316 with the addition option of stainless steel grade 304 lengths only

Applications include

- Food Processing - Low Level Process Environments
- Machinery - Production Line Equipment
- Civil Works - Tunnels and Bridges
- Oil & Gas - On Shore and Offshore
- Marine - Commercial and Naval

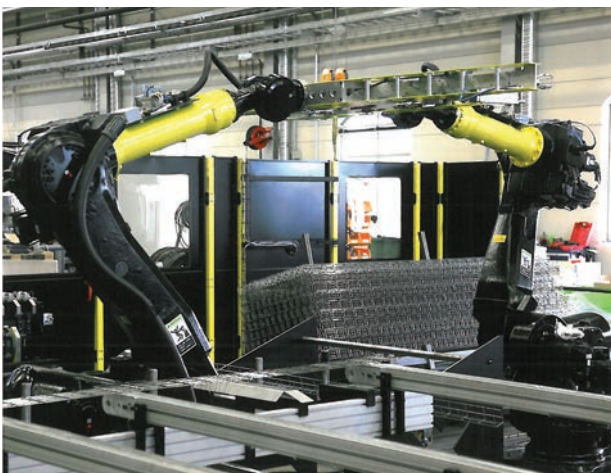

Wire Basket Cable Tray

...Quality and strength,
a winning combination...

- Designed specifically for process environments
- Ideal for installations at lower levels
- Variable support distances up to 6¹/₂ft
- Quick installation with independent location of any coupler
- Robust construction using the latest robotic induction welding techniques
- Minimal deflection levels with a choice of 2 wall profiles
- Choice of 9 widths with a diverse range of fixings and accessories


Product Specification:

Material:	304 - 1.4301 Stainless Steel (lengths only)
	316 - 1.4404 (optional)
Lengths:	8 ¹ / ₄ ft
	Width/Wire Diameter
	2" - 3" /0.16"
	4" - 12" /0.20"
	16" - 24" /0.24"
Side Profile:	2" or 4"
Fittings & Fixings:	316 - 1.4404
Standards:	cUL Classified IEC61537



LENGTHS

All wire basket lengths are 8 1/4 ft

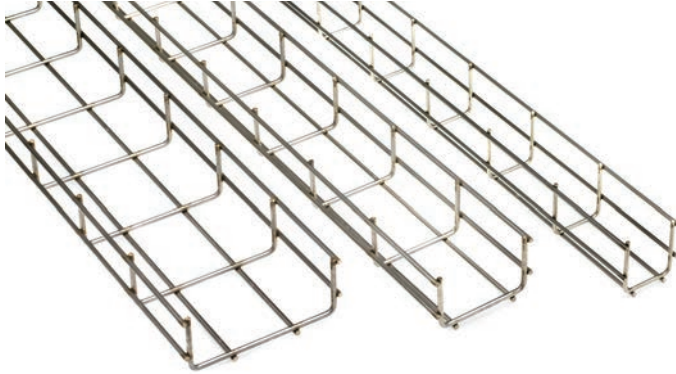


Dimensions


W x H (in)	Weight (lb)	304 Ref.	316 Ref.
2 x 2	3.7	XE-053-046-304	XE-053-046-316
3 x 2	4.4	XE-075-055-304	XE-075-055-316
4 x 2	6.7	XE-100-060-304	XE-100-060-316
6 x 2	7.2	XE-150-060-304	XE-150-060-316
8 x 2	9.6	XE-220-060-304	XE-220-060-316
12 x 2	12.2	XE-320-060-304	XE-320-060-316
16 x 2	16.8	XE-420-060-304	XE-420-060-316

W x H (in)	Weight (lb)	304 Ref.	316 Ref.
6 x 4	7.2	XE-150-110-304	XE-150-110-316
8 x 4	12.4	XE-220-110-304	XE-220-110-316
12 x 4	15.1	XE-320-110-304	XE-320-110-316
16 x 4	20.6	XE-420-110-304	XE-420-110-316
20 x 4	24.0	XE-520-110-304	XE-520-110-316
24 x 4	27.3	XE-620-110-304	XE-620-110-316


JOINER SELECTION

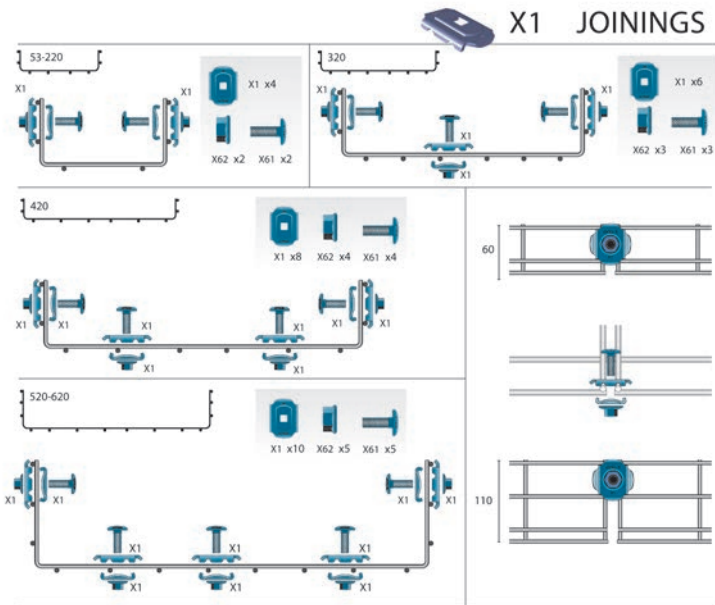

LOADING CHARTS 2"

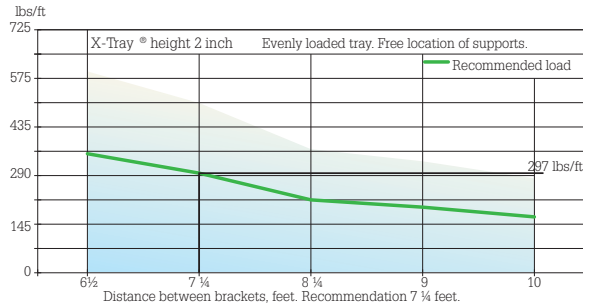


LOADING CHARTS 4"

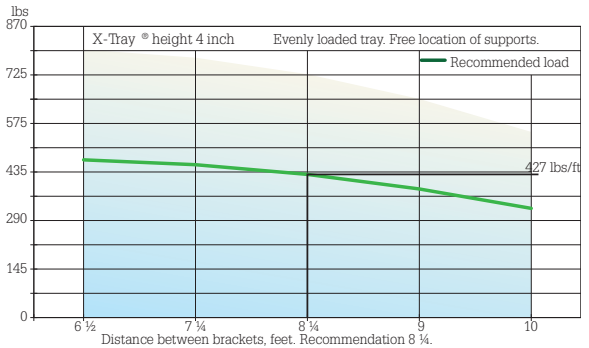



Max load is 1.7 times these values in accordance with IEC 61537


...Designed for strength...
...Built to last

BASKET FITTINGS

Length Joiner	W x H x L (in)	Weight (lb)	Part Ref.
	1 3/4 x 1 3/4	0.1	XE-X1

Bend Clamp	W x H x L (in)	Weight (lb)	Part Ref.
	1 x 1 1/4 x 1/2	0.1	XE-X2

Angle Bracket	W x H x L (in)	Weight (lb)	Part Ref.
	3 x 3 x 2	0.2	XE-X3

Hold Down Clamp	W x H x L (in)	Weight (lb)	Part Ref.
	2 x 2 3/4 x 2	0.1	XE-X4

M8 Nut & Bolts Pack	Pack Size	Weight (lb)	Part Ref.
	20	0.9	XE-X6162-20
	40	2.1	XE-X6162-40

Cantilever Bracket	Size	Weight (lb)	Part Ref.
	for up to 6 tray	0.5	XE-X15-53-150
	for 8 tray	0.6	XE-X15-220
	for 12 tray	1.4	XE-X15-320
	for 16 tray	1.7	XE-X15-420
	for 20 tray	2.6	XE-X15-520

Maxi Bracket	W x H x L (in)	Weight (lb)	Part Ref.
* use with 4" thru 8"	3 3/4 x 3 3/4 x 1	0.2	XE-X10-MAX1





Midi Bracket	W x H x L (in)	Weight (lb)	Part Ref.
* use with 3" & 4"	3 3/4 x 1 x 2 1/2	0.1	XE-X10-MIDI




Mini Bracket	W x H x L (in)	Weight (lb)	Part Ref.
* use with 2" & 3"	2 1/4 x 3 3/4 x 1	0.2	XE-X10-MINI



Accessories Holder	W x H x L (in)	Weight (lb)	Part Ref.
	6 3/4 x 5 3/4 x 1	0.2	XE-X63-1

Length Divider	H x L (in)	Weight (lb)	Part Ref.
	8 1/4 ft	2.8	XE-X64-45
		4.6	XE-X64-95

Length Cover	Size	Weight (lb)	Part Ref.	
	3ft	for 3 tray	1.5	XE-X65-075-316
		for 4 tray	1.8	XE-X65-100-316
		for 6 tray	2.4	XE-X65-150-316
		for 8 tray	4.6	XE-X65-220-316
		for 12 tray	6.3	XE-X65-320-316
	for 16 tray	8.1	XE-X65-420-316	

* dependent on mounting configuration



Application Specific Fittings & Accessories

...Labor saving products designed to reduce install costs...

Adjustable Fittings

- For use where non standard angles are required
- Compatible with all type 1 wireway systems
- Choice of Flat or Apex covers
- Available in front, outside and inside cover configurations
- Variable fixing position 0 – 30 degrees
- Reduces on site fabrication time
- Dividers available
- Simple and quick to install

Adjustable Fittings Key Features:

- **Forms additional fitting angles on site without specialist tools**
- **Suitable for Flat or Apex cover Type 1 Wireway**
- **Provides consistent finish when aligned with lengths or Fittings**
- **Available with inside, outside and front cover configurations**
- **Supplied with Cover, coupler and fixings screws**
- **Suitable for installations utilising 2", 3" and 4" widths**

Typical Applications Include

- Incline / decline conveyors
- Radius routing on rotary equipment
- Multi-lane conveyor routings
- Routing on awkward structural supports

Change of Cover Kits

- Offers the facility to rotate a Flat cover following the transition from Apex cover
- For the transition from Flat to Apex cover wireway (change of cover)
- Provides a continuous level cover
- Compatible with Lasnek Apex wireway

Change of Cover Kit Key Features

- Satin finish 304 Stainless Steel
- Connects Lasnek Type 1 Flat to Apex Wireway
- Allows transition with the cover in the same plane
- Supplied with universal rotation coupler
- Rotational coupler when used separately can connect and rotate flat cover wireway


Drop Flange Adapter


- Quick and easy connection of vertical to horizontal routed wireway
- Pre cut Adapter plate fits over the wireway trough in place of the standard wireway cover
- Connected to the vertical wireway by a standard Y / Flange Adapter fitting (K**-25)


Drop Flange Adapter Key Features

- Removes the requirement for installing a Tee fitting
- Reduces the requirement for cut pieces
- Easy alignment of cover

ADJUSTABLE FITTINGS


Inside Cover	Dimensions			
	W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
	2 x 2	1.91	K22-16-ADJ	X22-16-ADJ-D-UNI
	3 x 3	3.32	K33-16-ADJ	X33-16-ADJ-D-UNI
	4 x 4	4.55	K44-16-ADJ	X44-16-ADJ-D-UNI

Outside Cover	Dimensions			
	W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
	2 x 2	1.91	K22-17-ADJ	X22-17-ADJ-D-UNI
	3 x 3	3.32	K33-17-ADJ	X33-17-ADJ-D-UNI
	4 x 4	4.55	K44-17-ADJ	X44-17-ADJ-D-UNI


Front Cover	Dimensions			
	W x H (in)	Weight (lb)	Wireway Ref.	Divider Ref.
	2 x 2	1.91	K22-18-ADJ	X22-18-ADJ-D-UNI
	3 x 3	3.32	K33-18-ADJ	X33-18-ADJ-D-UNI
	4 x 4	4.55	K44-18-ADJ	X44-18-ADJ-D-UNI


* Also available in Apex Cover

APPLICATION ACCESSORIES


Change of Cover Kit	Dimensions		
	W x H (in)	Weight (lb)	Wireway Ref.
	3 x 3	1.17	K33-S10-CH-COV-K33
	4 x 4	1.55	K44-S10-CH-COV-K44
	6 x 6	2.07	K66-S10-CH-COV-K66

6" Piece complete with Rotation Coupler

Change of Rotation Coupler	Dimensions		
	W x H (in)	Weight (lb)	Wireway Ref.
	3 x 3	0.46	K33-22-R
	4 x 4	0.67	K44-22-R
	6 x 6	0.98	K66-22-R

Drop Flange Adapter	Dimensions		
	Width (in)	Weight (lb)	Wireway Ref.
	2	0.44	K22-27
	3	0.66	K33-27
	4	0.88	K44-27
	6	1.10	K66-27



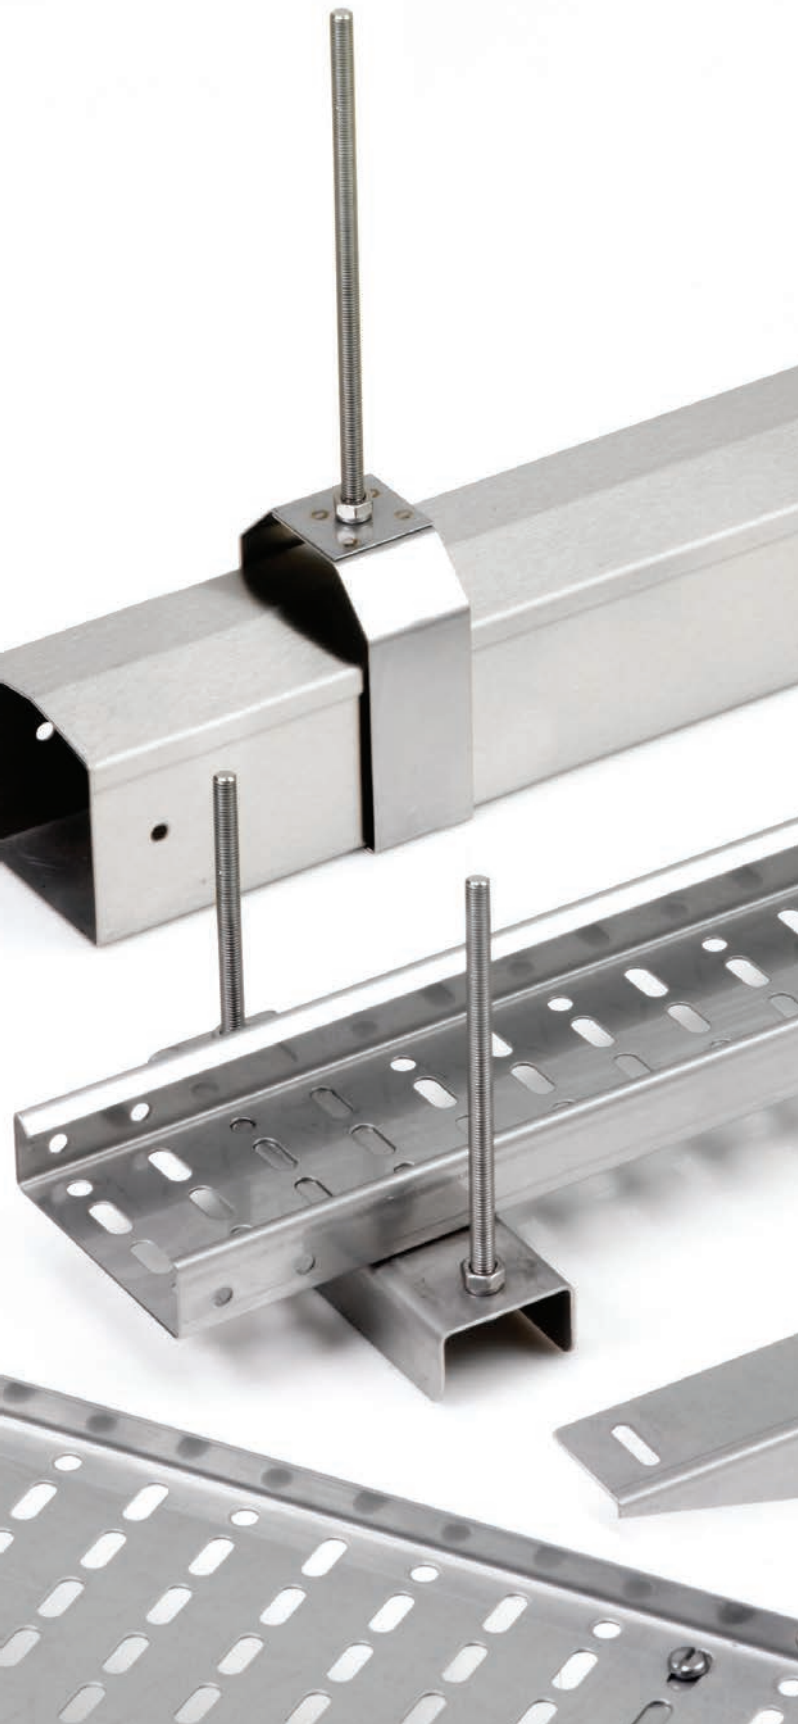


Brackets and Supports

...When it all hangs on Quality...

Range of individually developed Brackets specifically for use with the Lasnek ranges...

- Wireway
- Open Cable Tray
- Basket

Wall Bracket	HxL (in)	Weight (lb)	304 Ref.	316 Ref.
	2 x 2	0.5	TWB051	A-TWB051
	2 x 3	0.8	TWB076	A-TWB076
	2 x 4	0.8	TWB102	A-TWB102
	2 x 6	0.11	TWB152	A-TWB152
	2 x 8	0.27	TWB230	A-TWB230

Stirrup Hanger Bracket	HxL (in)	Weight (lb)	304 Ref.	316 Ref.
	2 x 2	0.1	SHB051	A-SHB051
	3 x 3	0.14	SHB076	A-SHB076
	4 x 4	0.18	SHB102	A-SHB102
	6 x 6	0.27	SHB152	A-SHB152



Lasnek Production Facility

<http://www.youtube.com/watch?v=OKcE7Rle-nI>



Type 1 Wireway -Adjustable Fitting

<http://www.youtube.com/watch?v=upK7rw3StQc>



Type 1 Wireway -Installing a Fitting Divider

<http://www.youtube.com/watch?v=2LGrAWE-neM>



TT & TT-S10 Series -Length Divider Installation

<http://www.youtube.com/watch?v=yGonPNxAN-o>



Type X4 Overview

<http://www.lasnek.com/downloads/lasnek-NEMA4X-wireway.pdf>

The logo for Lasnek, featuring the word "Lasnek" in a white, italicized sans-serif font, set against a green rectangular background with a white border. The background of the entire page is a blue-tinted image of a metal structure with perforated beams and a ladder.

1005 N Commons Dr
Aurora IL 60504

Tel: 1-866-995-9337

email: sales@lasnek.com
www.lasnek.com

